

## Usage and Maintenance

- ⊙ Please don't disassemble the sealed head, doing so can cause damage to the flashlight.
  - ⊙ High-power flashlights need batteries capable of high current electric discharge. We strongly recommend use rechargeable batteries for their high performance.
  - ⊙ Please take your battery out of the flashlight if you will not use the light for a long time, or the power of the battery has run out. Otherwise, some poor batteries may leak and damage the light.
  - ⊙ Please replace the O-ring if it becomes damaged after using for a long time, and regularly lubricate the O-rings so as to not erode the rubber. Doing so will also keep the flashlight properly sealed against water;
  - ⊙ Clean the contacts of your light periodically, especially when the flashlight flickers abnormally or cannot light up. There may be several reasons as follows:  
**Reason 1:** the batteries need to be replaced  
**Solution:** replace batteries (confirm the correct installation of anode and cathode).  
**Reason 2:** The threads, PCB board contact or other contacts are dirty.  
**Solution:** clean the contact points with an alcohol soaked cotton swab.
- If the above methods do not solve the issue, contact your distributor and refer to the warranty policy.


### SBFlashlights, LLC

Tel: 1-855-723-5274/ 1-281-954-9898  
<http://www.sbflashlights.com>  
E-mail: [sales@sbflashlights.com](mailto:sales@sbflashlights.com)

4

**L<sup>3</sup> Illumination**

*Taking your Illumination needs to the next power*

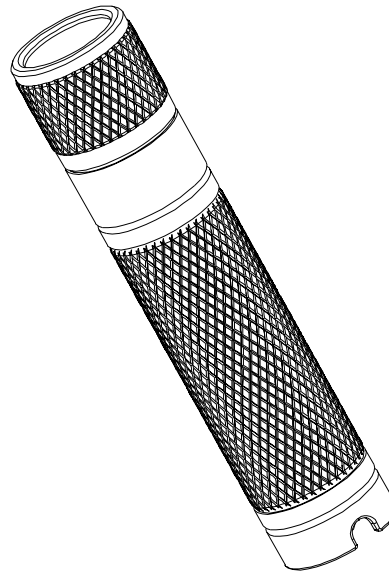

## L<sup>3</sup> Illumination L10

Max 120 Lumens

User manual


1

**L<sup>3</sup> Illumination**

*Taking your Illumination needs to the next power*

## About L<sup>3</sup> Illumination L10

- ⊙ L<sup>3</sup> Illumination L10 is the perfect portable AA flashlight in a very small size. Since 1AA battery delivers 3 times the electrical volume of one AAA battery, the L10 offers a brighter beam and much longer runtime with L<sup>3</sup> Illumination's advanced lighting technology.
- ⊙ Furthermore, the design featuring four modes of output with simply operation, you can get firely mode, lower, high brightness and strobe by simply rotating the head part.
- ⊙ If you are looking for a powerful, long running EDC flashlight in the smallest size, L<sup>3</sup> Illumination L10 is your perfect companion.

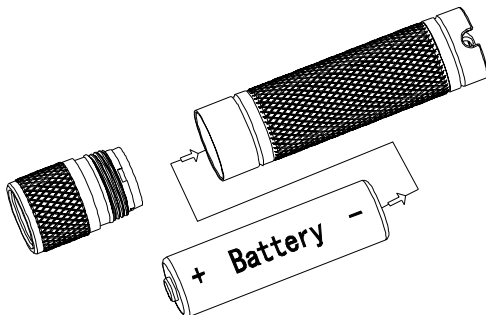

2

## Features

- ⊙ Three types of output:
  - firely (0.09 lumens 147 hours)
  - low (3 lumens 50 hours)
  - high (120 lumens 1 hour 40 minutes)
- ⊙ Max beam length: 50 metres
- ⊙ Impact resistance: 1.5 metres
- ⊙ Waterproof to IPX8 standard.
- ⊙ Cree XP-G LED (R5) with lifespan of 50,000 hours
- ⊙ Uses one 1.5V AA battery
- ⊙ Size: 79 mm (length) x 17.1 mm (diameter)
- ⊙ 20-gram weight (excluding battery).
- ⊙ Reliable twist switch,
- ⊙ Capable of standing up securely on a flat surface to serve as a candle;
- ⊙ Made of durable aircraft-grade aluminum;
- ⊙ Premium Type III hard-anodized anti-abrasive finish;
- ⊙ Toughened ultra-clear glass lens with anti-reflective coating.

Notice: The above-mentioned parameters ( tested with a 1200mAh Ni-MH battery ) are approximate and may vary between flashlights, batteries, and environments.

3